


Parameter

MODEL	PM/w	VOC/v	ISC/A	VMP/V	IMP/A	C-EFF	N/W(kg)	DIMENSION (mm)
SN-H6W	6.0	7.2	1.0	6.0	1.12	20.50%	0.1	280*150*3
SN-H18W	18.0	23.7	1.0	19.4	0.9	20.50%	0.3	434*277*3
SN-H25W	25.0	21.6	1.5	18.0	1.4	20.00%	0.6	560*277*3
SN-H30W	30.0	21.2	1.8	17.6	1.7	19.60%	0.5	535*378*3
SN-H50W	50.0	21.2	3.1	17.6	2.8	21.50%	0.7	545*535*3
SN-H60W01	60.0	21.0	3.8	17.5	3.4	19.60%	0.9	725*535*3
SN-H60W02	60.0	42.3	1.9	35.2	1.7	19.60%	0.9	725*535*3
SN-H90W	90.0	18.5	6.3	15.2	5.9	20.60%	1.2	920*540*3
SN-H100W	100.0	21.6	6.0	17.8	5.6	19.90%	1.4	1050*540*3
SN-H110W	110.0	23.7	5.9	19.8	5.6	20.00%	1.5	1175*540*3
SN-H120W	120.0	26.4	5.9	22.0	5.5	20.00%	1.8	1305*540*3
SN-H135W	135.0	29.5	5.8	24.9	5.5	20.00%	2.0	1435*540*3

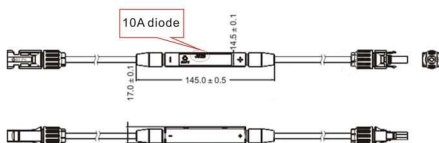

Standard IP67 waterproof junction box with 90CM cable and MC4 Connectors.

MODEL	PM/w	VOC/v	ISC/A	VMP/V	IMP/A	C-EFF	N/W (kg)	DIMENSION (mm)
SN-H150W	150.0	32.0	5.9	27.4	5.5	20.00%	2.5	1300*660*3
SN-H180W	180.0	40.0	6.0	33.0	5.5	19.00%	3.0	1300*800*3
SN-H200W	200.0	42.0	6.3	35.0	5.7	19.00%	3.5	1435*800*3
SN-H220W	220.0	48.3	5.9	39.82	5.5	19.50%	4.5	1560*800*3
SN-H250W	250.0	54.0	6.1	45.0	5.6	20.00%	5.0	1810*800*3
SN-H300W	300.0	66.0	6.5	55.0	5.5	19.00%	6.5	1810*920*3

